


L451/451L

Open Front 4-Post Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

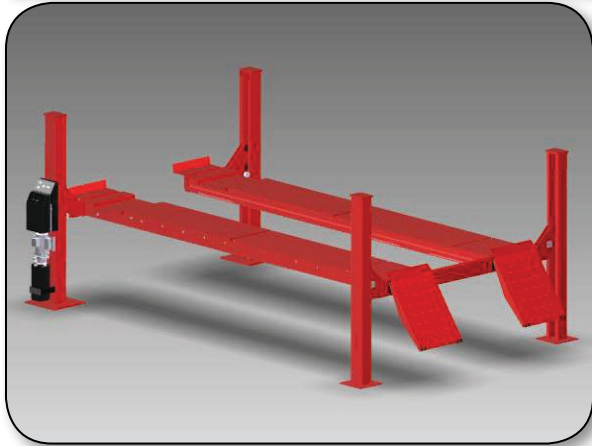

L451 Open Front 4 Post Lift

Power Requirements

435E	208/230/400/460 VAC, 3 phase, 50 HZ, 9 A
50E	208/230 VAC, 1 phase, 50 HZ, 25 A

Site Specifications



Air Supply Requirements	Lift: 6.2-10.3 bar (90-150 PSI)
	Optional Jack: 8.6 bar (125 PSI) minimum
Minimum Concrete Spec.	102 mm (4 in.) thick, 20,700kPa (3000 PSI) rating
Maximum Floor Variation	76 mm (3 in.) between any two posts

Product Specifications

Max. Vehicle Weight	8164 kg (18,000 lbs.)
Max. Wheelbase	
General Service	L451: 4902 mm (193 in.) L451L: 5766mm (227 in.)
Two-Wheel Alignment	L451: 4496 mm* (177 in.) L451L: 5360mm* (211 in.)
Four-Wheel Alignment	4013 mm (158 in.)
Alignment Height	Any of 16 lock positions
Min. Four-Wheel Alignment	2235 mm (88 in.)
Lifting Speed	77 seconds
Lowering Speed	40 seconds

* Jacking compensation may be required to align some long wheelbase vehicles.

MODEL FEATURES / DIMENSIONS / OPTIONS

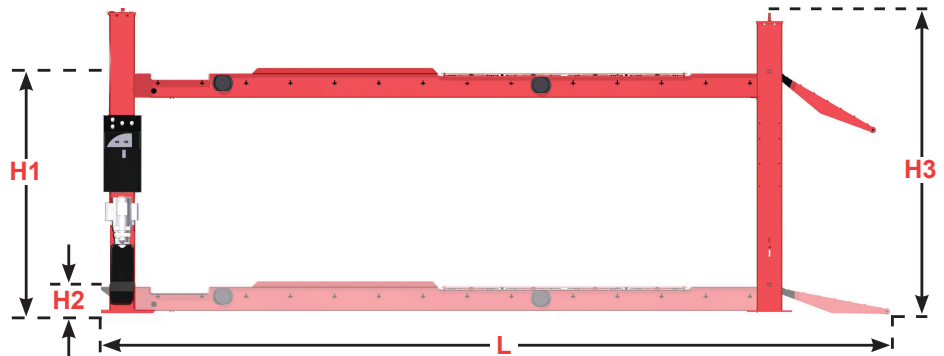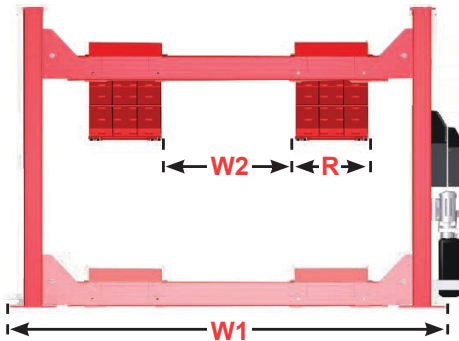

Dimensions

Width (W1)	3670 mm 144.5 in.
Inside Width (W2)	1016 mm 40 in.
L451 Length (L)	6540 mm 257.75 in.
L451L Length	7372 mm 290.25 in.
Runway Width (R)	660 mm 26 in.
Runway Height (H1)	1905 mm 75 in.
Stack Height (H2)	222 mm 8.75 in.
Post Height (H3)	2489 mm 98 in.

Features

PS

IS

	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/>

Options

Add. Length

Kit

Approach Ramp Extension	445 mm 17.5 in.	20-3145-1
Extended Approach Ramp Extension	1016 mm 40 in.	20-3146-1
Drive Thru Kit	965 mm 38 in.	20-3135-1
Front Mount Power Unit Bracket	-	20-3072-1
Rack Lighting	-	20-2993-1

For general inquiries visit:

www.hunter.com

or call

800-448-6848

For lift rack information visit:

www.hunter.com/rack

For local contact visit:

www.hunter.com/company/findrep.cfm

Cont'd on Page 2




L451/451L

Open Front 4-Post Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

L451L DIMENSIONS

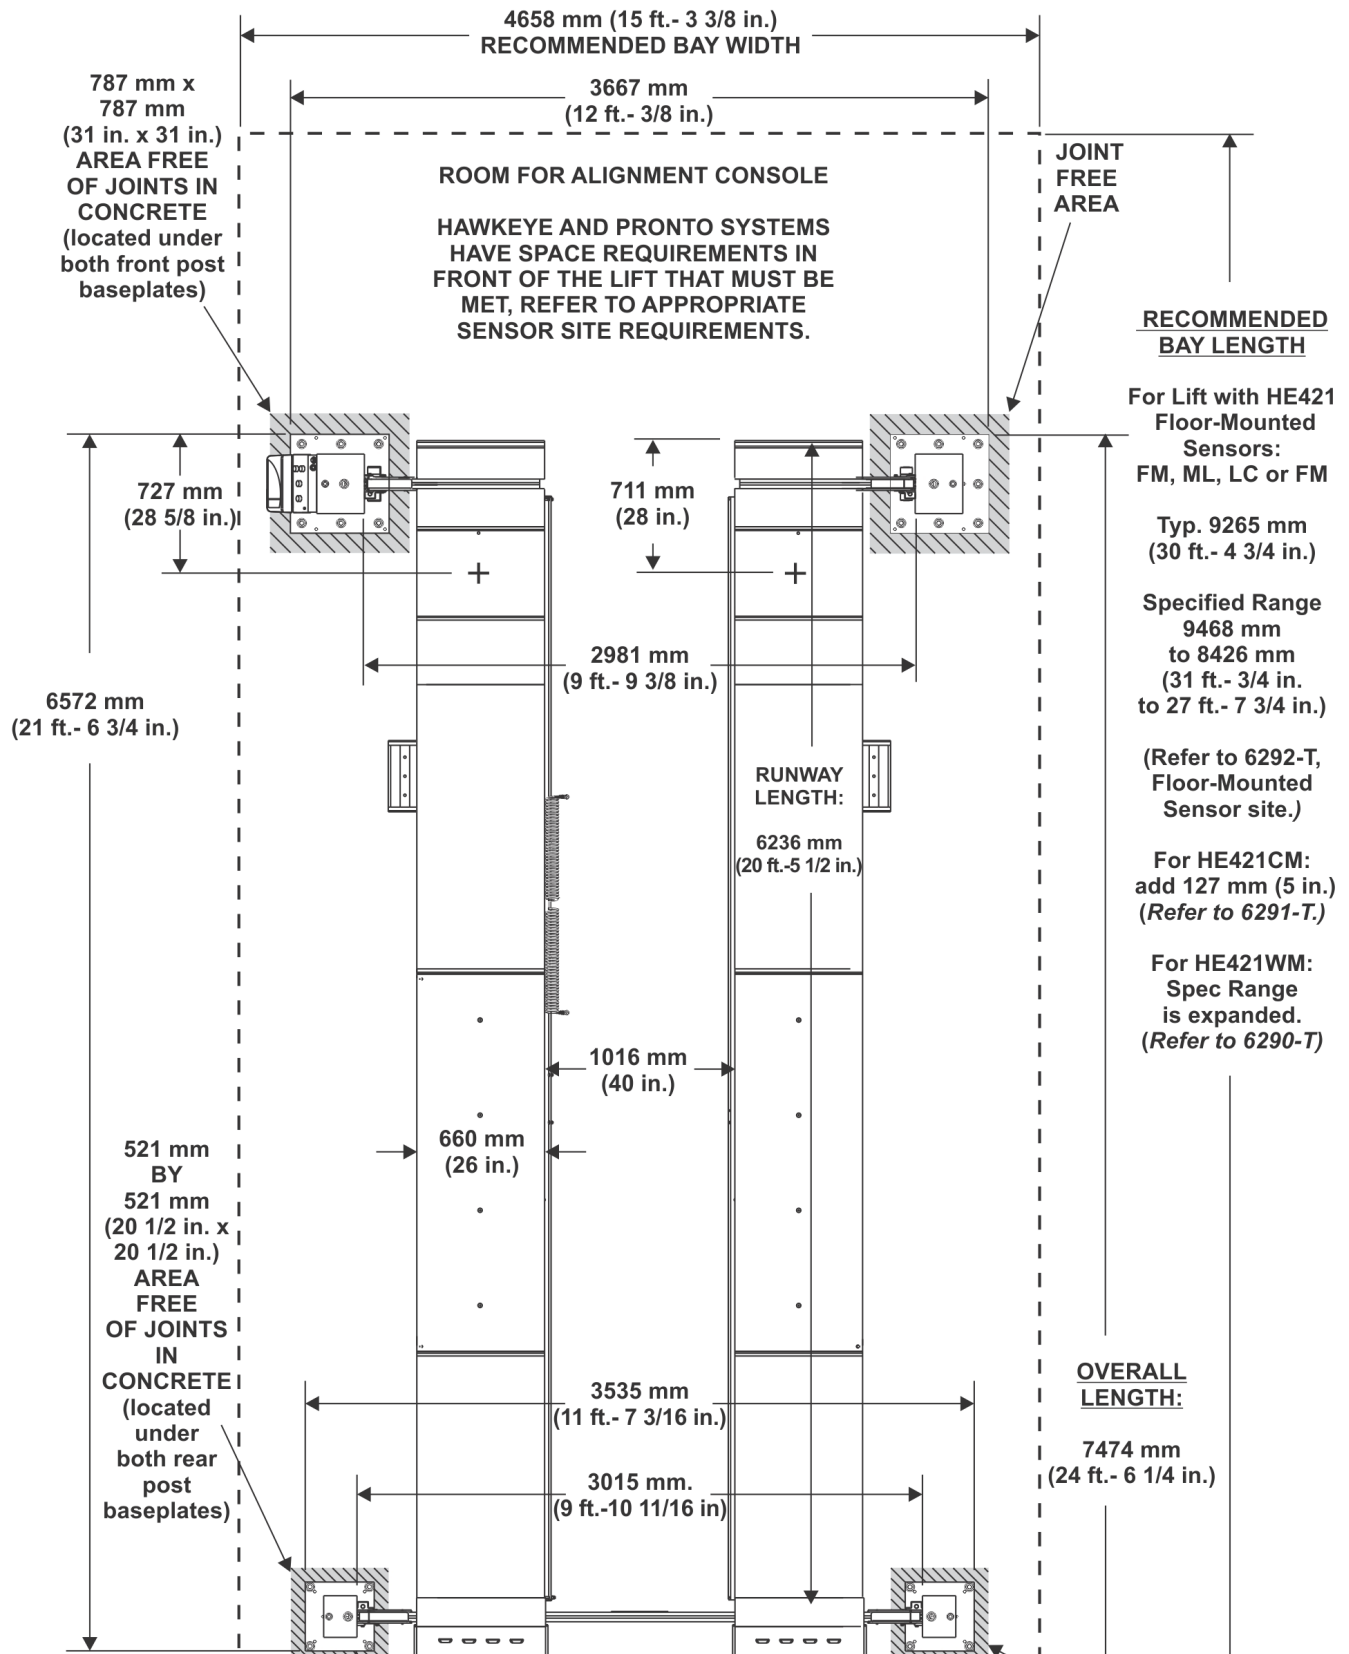

*If installing over basement or near seams and cracks, refer to Form 4963-T. For exact placement of lag bolts, refer to Form 6530-T.