


Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

4-Post Lift Racks with 660 mm Runways (current production L45x)

		FLOOR SLOPE (millimeters of additional gap under rear post due to slope)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm	76 mm	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	▲ 2012 Accord
	165	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	
	152	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	▲ C6 Corvette
	140	OKAY WITH NO EXT.	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	1016 mm EXT. (20-3146-1)	
	127	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	
	114	445 mm EXT. (20-3145-1)	445 mm EXT. (20-3145-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	NOT POSSIBLE	
	102	445 mm EXT. (20-3145-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	NOT POSSIBLE	NOT POSSIBLE	
	89	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-3146-1)	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	
76	1016 mm EXT. (20-3146-1)	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE		

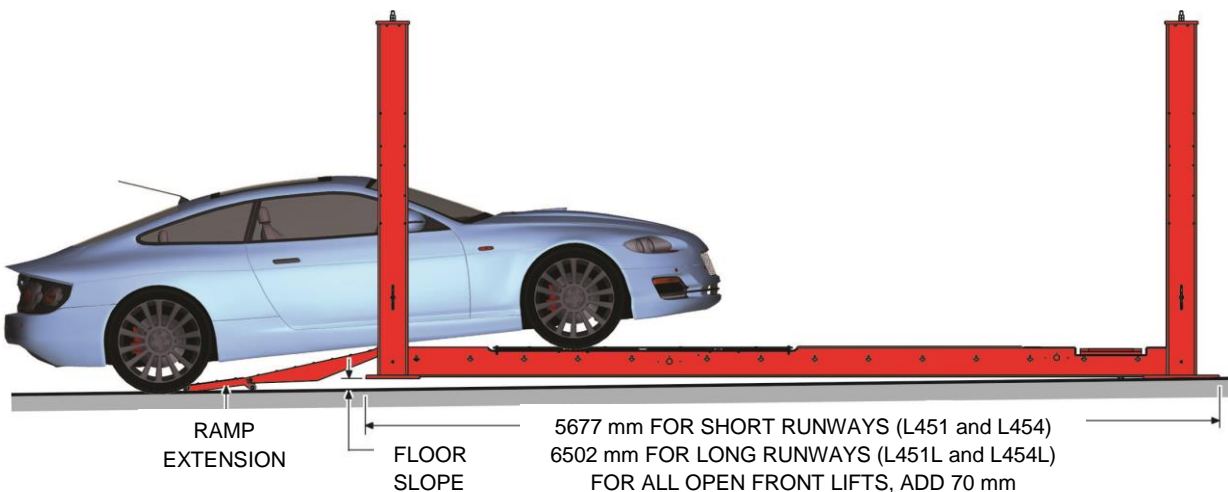


Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.

NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

4-Post Lift Racks with 572 mm Runways (L44x and early L45x)

		FLOOR SLOPE (millimeters of additional gap under rear post due to slope)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm	76 mm	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	▲ 2012 Accord
	165	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	
	152	OKAY WITH NO EXT.	OKAY WITH NO EXT.	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	
	140	OKAY WITH NO EXT.	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	1016 mm EXT. (20-2033-1).	▲ C6 Corvette
	127	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	
	114	445 mm EXT. (20-1365-1)	445 mm EXT. (20-1365-1)	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	NOT POSSIBLE	
	102	445 mm EXT. (20-1365-1)	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	NOT POSSIBLE	NOT POSSIBLE	
	89	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	1016 mm EXT. (20-2033-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	
76	1016 mm EXT. (20-2033-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE		

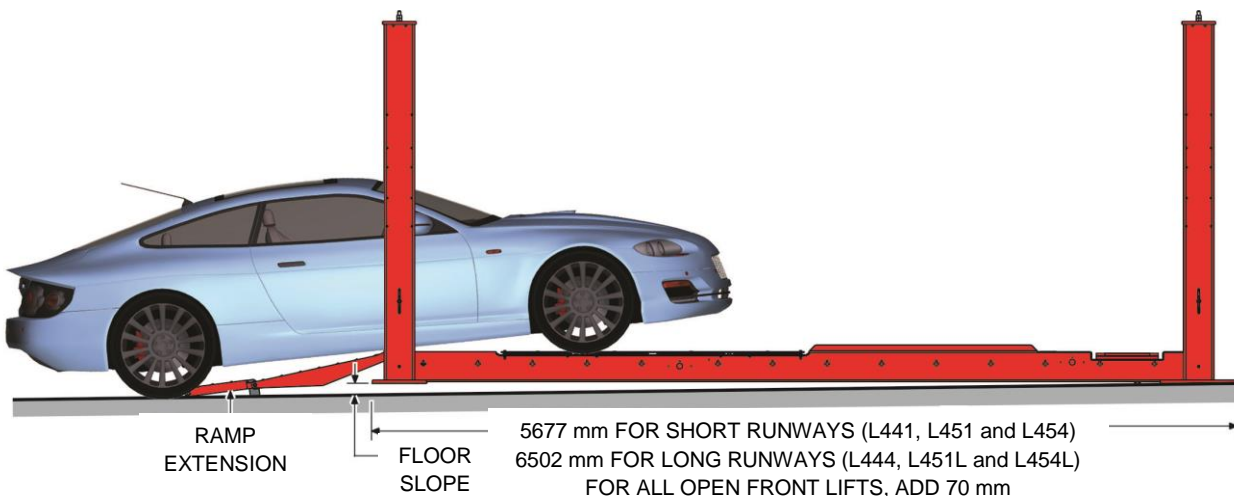

Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.


NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

RX45 Lift Rack

		FLOOR SLOPE (millimeters of rise over length of base)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm *	76 mm *	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	▲ 2012 Accord
	165	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	152	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	140	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	▲ C6 Corvette
	127	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	
	114	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	102	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	89	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
76	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE		

* Exceeds specified floor slope for lift.

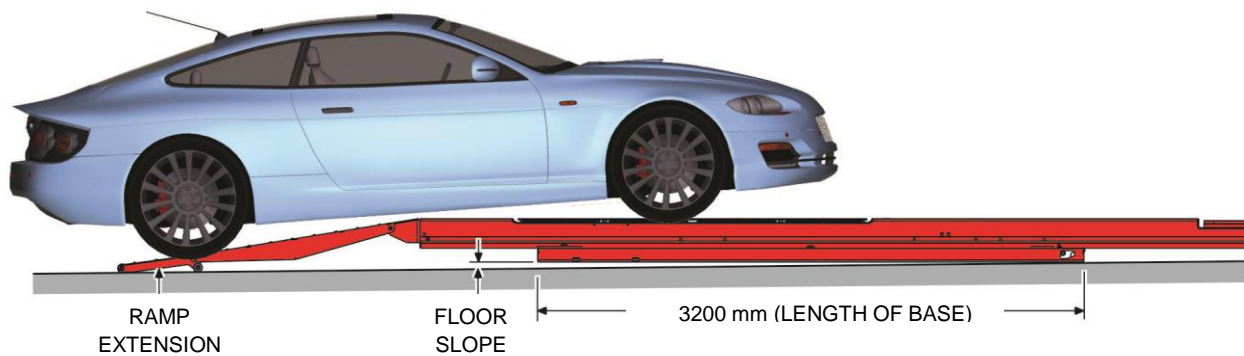

Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.


NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

RX45L Lift Rack

		FLOOR SLOPE (millimeters of rise over length of base)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm *	76 mm *	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	▲ 2012 Accord
	165	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	152	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	140	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	127	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	▲ C6 Corvette
	114	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	102	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	89	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	NOT POSSIBLE	
76	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	

* Exceeds specified floor slope for lift.

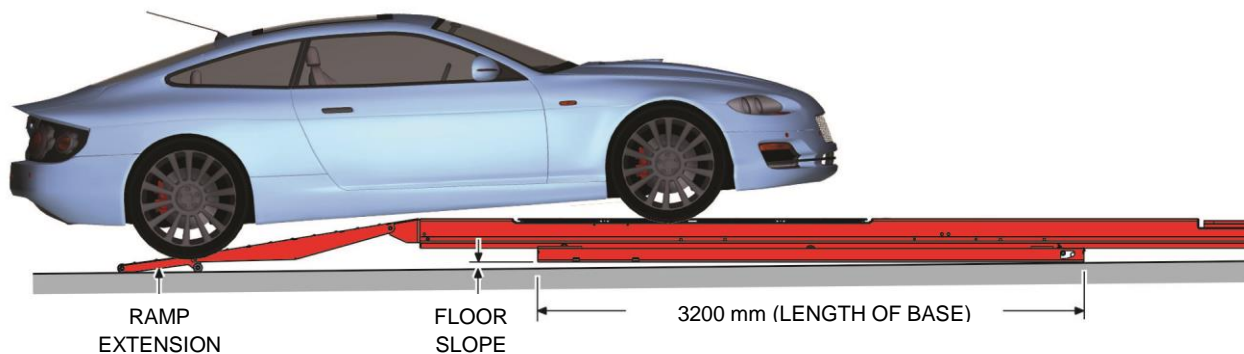

Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.


NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

RX54 Lift Rack

		FLOOR SLOPE (millimeters of rise over length of base)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm *	76 mm *	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	▲ 2012 Accord
	165	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	
	152	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	1016 mm EXT. (20-2169-1).	▲ C6 Corvette
	140	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	127	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1)..	1016 mm EXT. (20-2169-1).	
	114	OKAY WITH SUPPLIED EXT.	OKAY WITH SUPPLIED EXT.	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1)..	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	
	102	432 mm EXT. (20-3113-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1)..	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	NOT POSSIBLE	
	89	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1)..	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	
	76	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	

* Exceeds specified floor slope for lift.

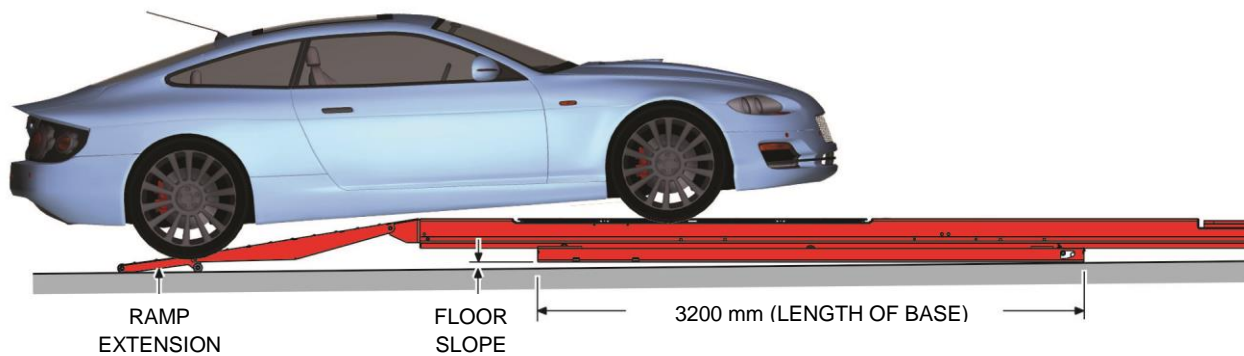

Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.


NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

RX72 Lift Rack

		FLOOR SLOPE (millimeters of rise over length of base)							
		0 mm	13 mm	25 mm	38 mm	51 mm	64 mm *	76 mm *	
VEHICLE GROUND CLEARANCE (millimeters)	179	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	▲ 2012 Accord
	165	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	152	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	
	140	OKAY WITH NO EXT.	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	1016 mm EXT. (20-2169-1).	▲ C6 Corvette
	127	OKAY WITH NO EXT.	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	114	OKAY WITH NO EXT.	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	432 mm EXT. (20-3113-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	
	102	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	305 mm EXT. (20-3112-1)	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	
	89	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	1016 mm EXT. (20-2169-1).	NOT POSSIBLE	NOT POSSIBLE	
76	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	1270 mm EXT. (20-2189-1).	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	NOT POSSIBLE	

* Exceeds specified floor slope for lift.

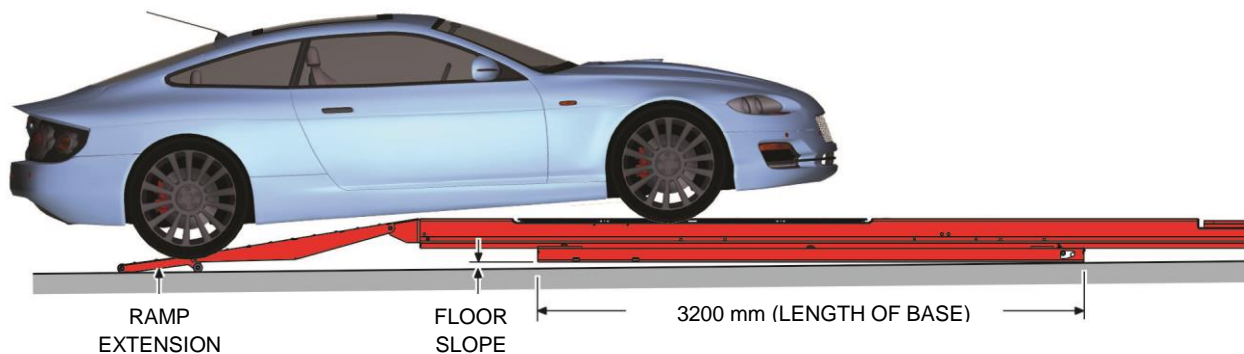

Contact as a vehicle approaches or breaks over the ramp depends on many factors. Wheelbase, wheel size, mid rocker height and details of the front bumper / valance affect a vehicle's ability to clear the ramp. The table is based on estimates of typical OEM vehicles. Deviation between table data and some vehicles is to be expected.


NOTE This information is repeated in English units on Form 6652-T.

Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks


4-Post Extension Dimensions

EXTENSIONS FOR 660 mm RUNWAYS	EXTENSIONS FOR 572 mm RUNWAYS	EFFECTIVE LENGTH (A)	OVERALL LENGTH (B)	RAMP AND EXTENSION (C)	OVERALL HEIGHT (D)
432 mm EXT. (20-3145-1)	432 mm EXT.* (20-1365-1*)	424 mm	470 mm	1311 mm	97 mm
1016 mm EXT. (20-3146-1)	1016 mm EXT. (20-2033-1)	1016 mm	1062 mm	1902 mm	114 mm

* The 432 mm extension (20-1365-1) for 572 mm runways is not represented in dimension table or figures. This unique design with lifter blocks instead of rollers has not been continued.

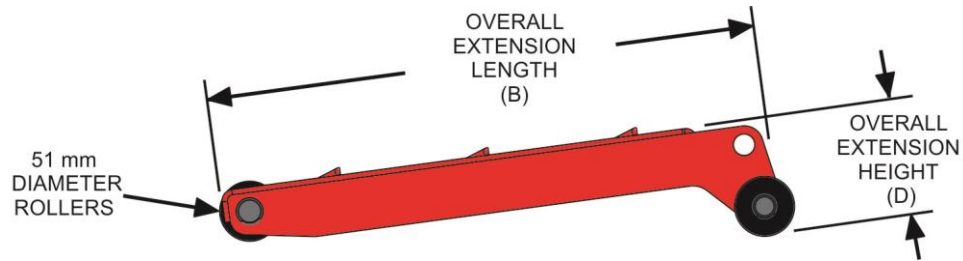

4-Post Extension

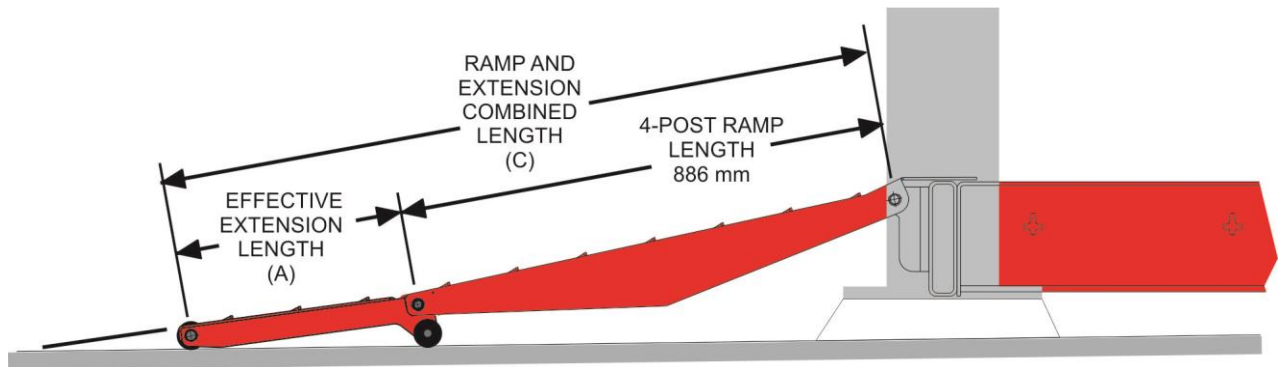


4-Post with Extension

NOTE This information is repeated in English units on Form 6652-T.


Vehicle Ground Clearance Tables / Ramp Extension Recommendations for Hunter Lift Racks

RX Extension Dimensions

RX LIFT RACK EXTENSIONS	EFFECTIVE LENGTH (A)	OVERALL LENGTH (B)	RAMP AND EXTENSION (C)	OVERALL HEIGHT (D)
305 mm EXT. (20-3112-1)	297 mm	343 mm	1603 mm	94 mm
432 mm EXT. (20-3113-1)	424 mm	470 mm	1730 mm	94 mm
1016 mm EXT. (20-2169-1)	1016 mm	~1067 mm.	2322 mm	152 mm
1270 mm EXT. (20-2189-1)	1270	~1321 mm	2576 mm	132 mm.

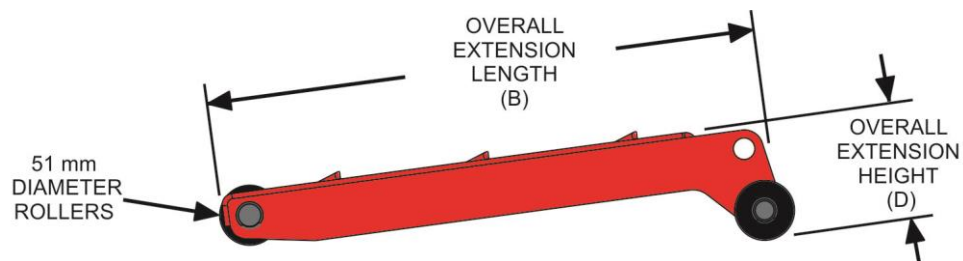

RX Extension

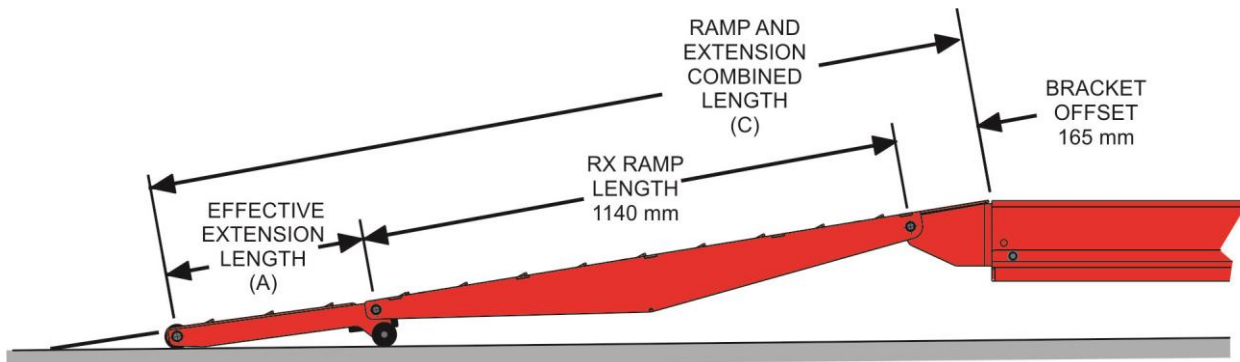

RX with Extension

NOTE This information is repeated in English units on Form 6652-T.